


OFP-120-R

The red medium intensity type B or C flashhead OBSTAFLASH120 is designed for night marking of obstacle such as stacks, intermediate pylons with 3 legs, facade of high rise buildings.

A system that includes 3 red OBSTAFLASH120 120° around the obstacle and an OBSTA power cabinet complies with ICAO red medium intensity type B (or type C, CAA) and FAA L-864.

P/N : **113752**

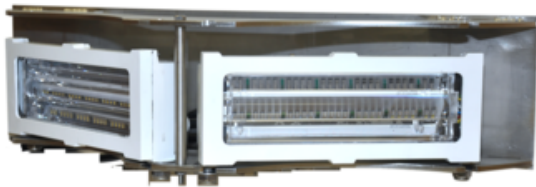



Key Points

The flashhead P/N113752 includes

- 2 led projectors in glass and aluminium coming with 1 meter of molded cable
- Stainless support for the 2 projectors (junction box for 2 or 6 projectors to be ordered separately)

Patents: EP3230651, FR1462349, Pat. 10,247,386

Electrical Characteristics	
Average power consumption	8W (night time only @ 30fl per minute)
Mechanical Characteristics	
Operating temperature	-40/+55°C
Size of the light	120mm (height) x 480mm (width)
Weight	4kg
Wiring	Entry of cable by glands nickel plated brass and connection by terminals

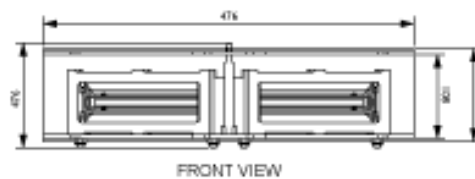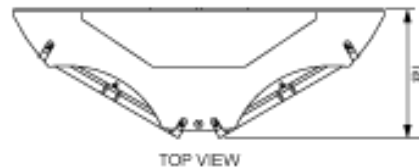

Photometric Characteristics		
Effective light output night mode at 0° on site		2000cd (red)
Color night time		Red
Vertical beam spread		>3°
Horizontal beam spread		360° with 3 flashheads fixed at 120° around the obstacle
Flash per minute		30
Standards		
Standards compliance		ICAO annex 14 chapter 6, FAA (AC 150/5345-43H), EASA, DGAC, CAA