

## OFP-120-RW-XL

The dual color type A & B/C medium intensity flashhead OBSTAFLASH120 is designed for day and night marking of obstacle such as chimneys, pylons, facade of high rise buildings.

A system that includes 3 OBSTAFLASH120 around the obstacle (more if diameter is higher than 6 meters) and an OBSTA power cabinet complies with ICAO dual color medium intensity and has been certified to FAA L-865/L-864.

P/N : 113747LX





Patents: EP3230651, FR1462349, Pat. 10,247,386

### Key Points

The flashhead OFP-120-RW-XL includes

- 2 led projectors coming with 'X' meter of cable and connector (up to 30 meters to be defined at time order)
- Stainless support for the 2 projectors

Mechanical Characteristics		
Operating temperature		-40/+55°C
Size of the light		120mm (height) x 480mm (width)
Weight		4kg
Wiring		X meter of molded cable with connector

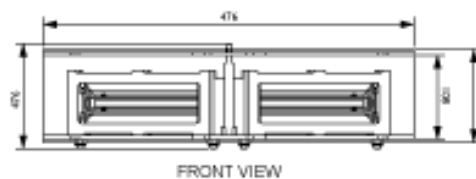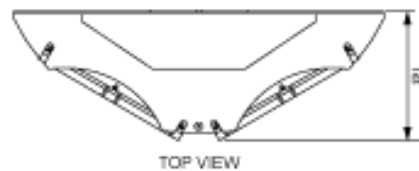

Photometric Characteristics		
Effective light output day time at 0° on site		20 000cd (white)
Effective light output twilight mode at 0° on site		20 000cd (white)
Effective light output night mode at 0° on site		2000cd (red)
Color day/twilight time		white
Color night time		Red
Horizontal beam spread		360° with 3 flashheads fixed at 120° around the obstacle
Flash per minute		40
Standards		
Standards compliance		ICAO annexe 14 chapter 6 (7th edition 2016), EASA (4th edition 2017)