

# STI-AL-48

Junction and monitoring box for red obstruction light

P/N : 113145

The range of monitoring and junction boxes we propose is defined to facilitate the implementation and monitoring of red fixed OBSTA lights in 120VAC 240VAC or 48VDC . These metal boxes are suitable for EMC environments and severe climatic conditions. • lower part consisting of terminals and fully wired relays • excellent waterproofing (climatic & electromagnetic) • simple fixing & easy connection




## Key Points

Alarm box for 2 OBSTA STI • painted and molded aluminum boxes • cable inputs by gland nickel plated brass • connection of two lights in 'simultaneous' operation or 'main and back-up' • connection of the 2 default information

### Electrical Characteristics

Voltage	48 Vdc
---------	--------

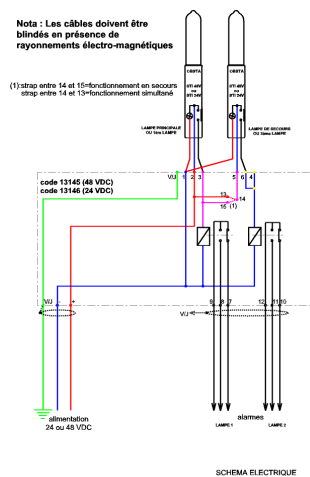

GESTION DES ALARMES PAR CONTACT SEC

### Mechanical Characteristics

IP degree	IP65 in vertical position
Weight	1,9 kg
Cable entry diameter	from 8 to 15 mm
Wire cross section	from 1 to 4 mm <sup>2</sup>
Attachment	4 screws type M5

Mechanical Characteristics

